
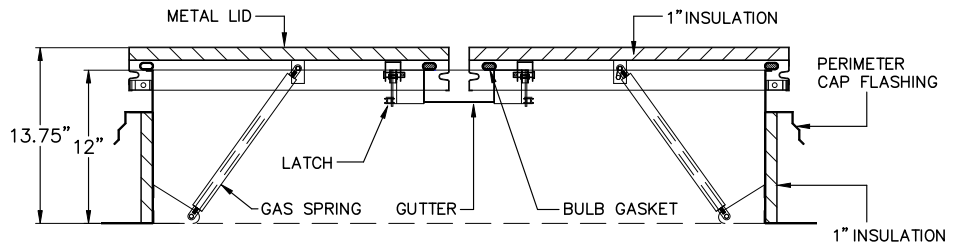


ExoVent™ Solid Lid

UL LISTED HEAT & SMOKE VENTILATOR WITH SOLID METAL LID

ExoVent™ prioritizes durability in design. These solid lid ventilators are made of galvanized steel or aluminum, ensuring extended lifespan compared to daylighting models which fatigue from sun exposure. The reinforced insulated lid maintains thermal efficiency. Aluminum models provide excellent weather resistance and weight reduction, while galvanized steel offers a lower cost alternative.

- UL 793 Listed Twin Leaf Solid Lids
- Insulated Lid with Interior Liner
- Inside/Outside Release Handles
- UL Fusible Links open at preset temp
- High Performance Gas Springs

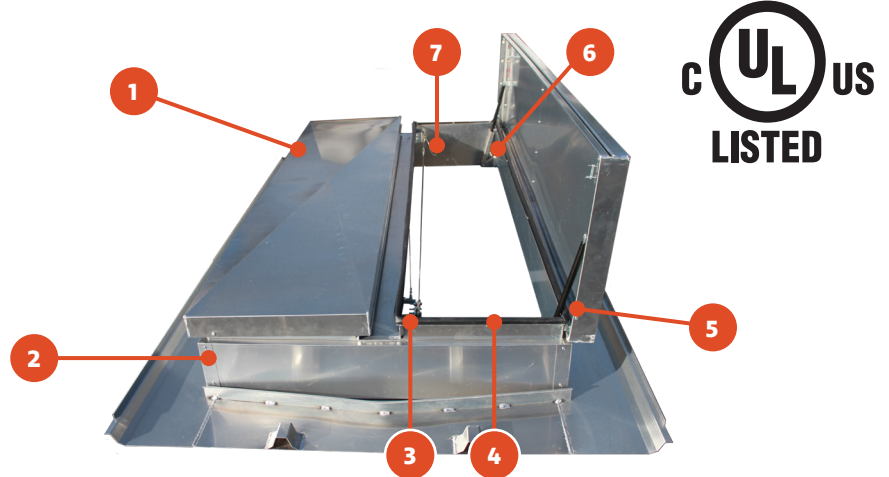

STANDARD PRODUCT FEATURES

- LID** – The solid metal lids are crowned for watershed. Materials are 0.063" aluminum or 18 GA galvanized steel with 1" polyiso insulation. Uplift rating is 30 PSF.
- CURB** – 12" high with 1" polyiso insulation and liner. Constructed of 0.080" aluminum or 18 GA galvanized steel.
- FIRE LINKS** – Heat activated UL listed fusible links. Options (F°): 165°, 212°, 286°, 370°, 520°. Interior and exterior manual releases.
- GASKETS** – High-quality extruded EPDM bulb gasket secured to the entire perimeter of the curb opening.
- SPRINGS** – Low spring rate nitrogen gas springs for controlled operation. Lids open against a 10 PSF snow load.
- HOLD OPEN** – Aluminum or steel automatic hold open channel locks doors in an open position.
- LATCHES** – 12 GA mechanical latches engineered for a 90 PSF uplift. Material options include zinc plated or stainless-steel.
- CAP FLASHING** – For flashing to conventional roof systems. May be used as attachment point when lifting vents to the roof. *Not shown on image

ORDERING OPTIONS

- Aluminum or Galvanized Steel Construction
- McCabe® Resettable Electronic Release Link
- Powder Coat or Kynar Custom Color Finish
- Fall Protection Screen (4" x 4" x 3/16" OSHA-Compliant)
- High-Capacity Model for 20-40 PSF Snow Loads
- High-Uplift Model up to 90 PSF Uplift Conditions
- Base: Metal Building, Self-Flushed, Curb Mount

STANDARD SIZES

| Model | Inside Clear Opening |
|---------|----------------------|
| UL-4848 | 48" x 48" |
| UL-4896 | 48" x 96" |
| UL-6060 | 60" x 60" |
| UL-6072 | 60" x 72" |
| UL-6096 | 60" x 96" |



CALL: (800) 423-1619 CLICK: RSROOFPRODUCTS.COM
 630 TODD LN., UNIT B • SANTA PAULA, CA 93060